



goslyn™ MODEL GOS80 25 GPM Grease Recovery Device

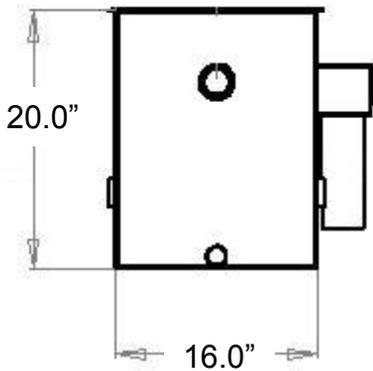

The innovative (patented) goslyn™ is an immiscible liquid separator which operates under hydro static pressure and does not require any moving parts. It continuously and permanently removes Fats, Oils & Greases from waste effluent - keeping your drains free and clear while eliminating the need for costly dousing systems or grease trap pumping. Discharged oil can be recycled along with your used fryer oil!

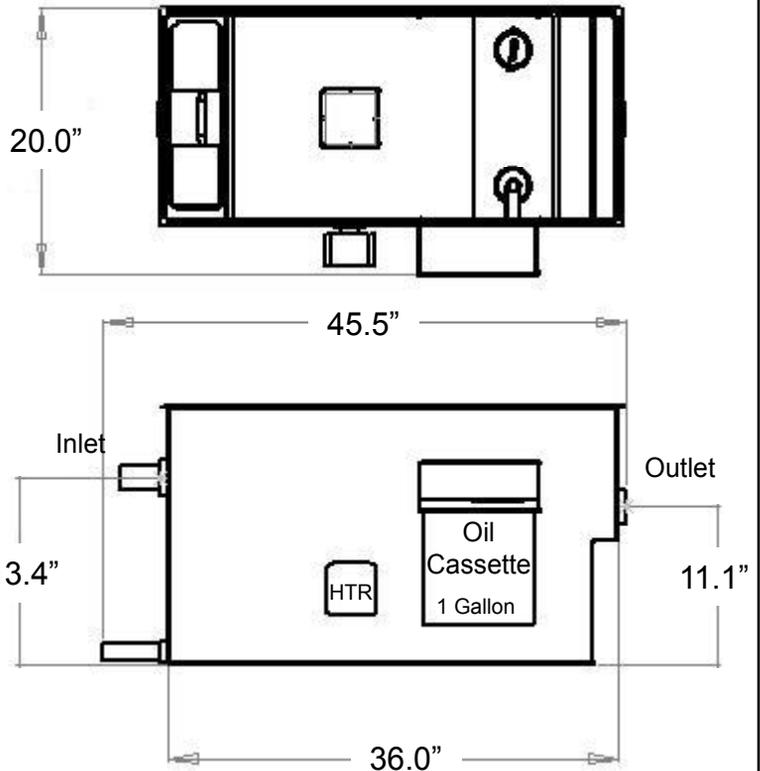

GOS80 Features:

- HEAVY DUTY 2.5 MM 304 SS EXTERIOR CONSTRUCTION
- NEOPRENE SEALS FOR BASE
- FIXED RATE FLOW RESTRICTOR INCLUDED (25 GPM)
- IMMERSION HEATER (UL LISTED) TO KEEP EFFLUENT WARM DURING IDLE PERIODS
- SELF-CLOSING DRAIN VALVE INCLUDED
- STRAINER BASKET TO PREVENT SOLID DEBRIS FROM ENTERING DRAIN PIPES
- EASY ACCESS HINGED LID COMPARTMENTS
- TWO OIL COLLECTION CASSETTES INCLUDED
- NSF CERTIFIED TO ASME A112.14.3 and ASME A112.14.4

Low profile GOS80LP also available


Installation Requirements

Electrical:

110 Volt, 1000 watts, 9 Amps - within 5 feet of Goslyn.

Physical:

- Headroom needed above strainer basket: 12"
- 2" drain pipe to outlet
- Access to front Oil Cassette
- Access to hinged lid for Oil Valve

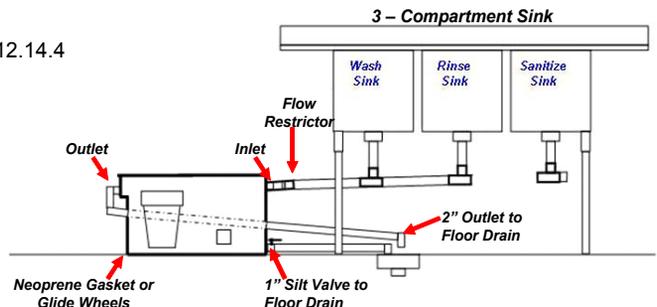

Goslyn LP
1971 University Business Dr.
Suite 102
McKinney TX 75071
214-618-3764
www.goslyn.com

Call your dealer:
The Plumbing Doc
Bakersfield, CA
(661) 836-1620

